


Sintex SINCE 1975

**WATER STORAGE
SOLUTIONS**

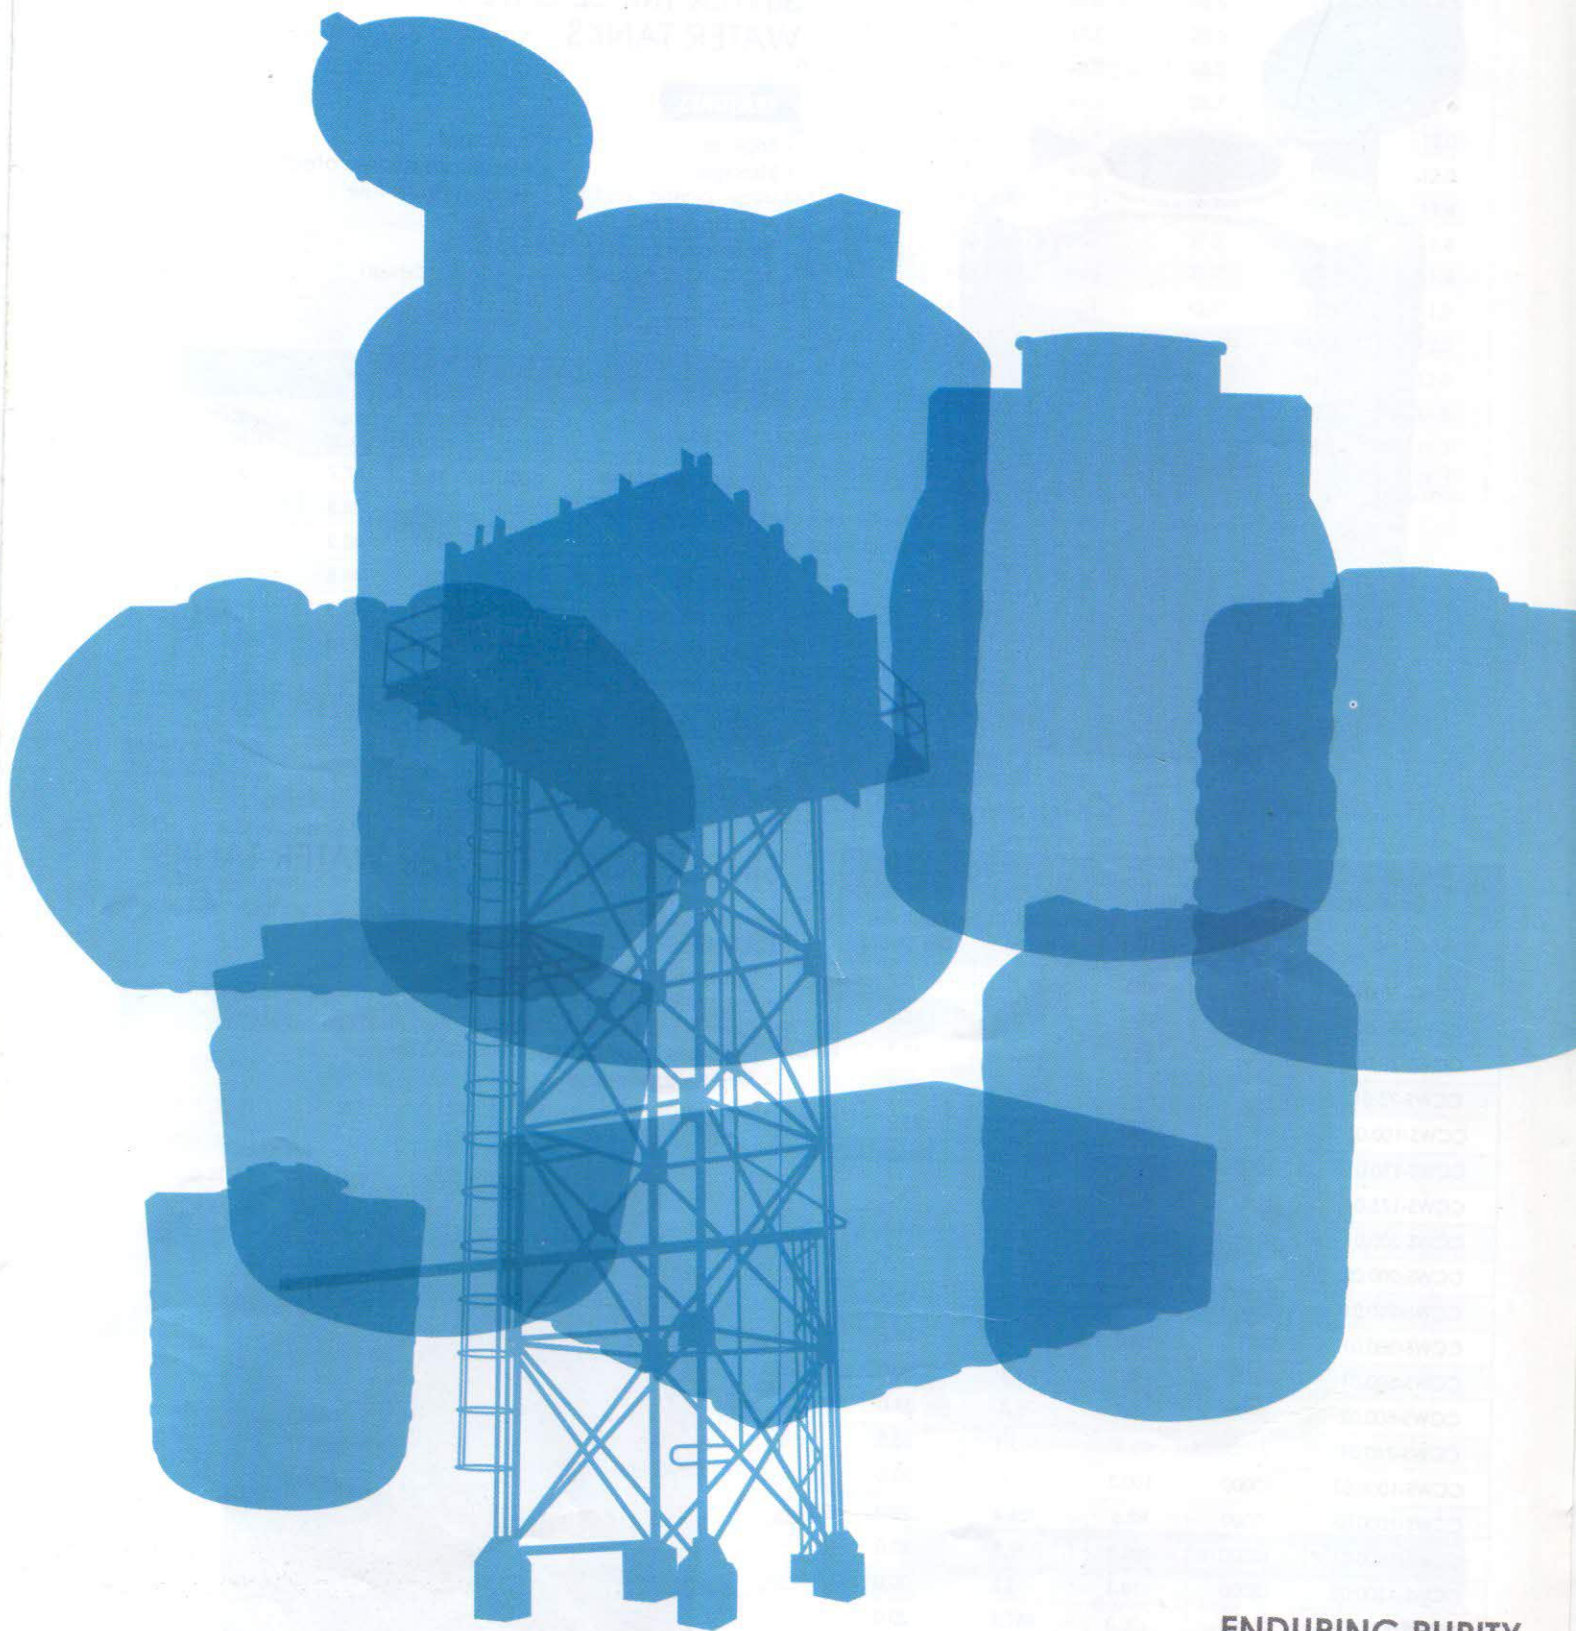

ENDURING PURITY

SINTEX
ACTIVE THINKING

**WE
MAKE
SENSE**

Safe water is a basic need and in today's pollution prone environment, hygiene of water is essential. Sintex water storage solutions deliver high standards of hygiene at a reasonable cost. The triple-layer water tank, an innovation that offers threefold protection, along with Reno, RenoTuf, Reno G, Loft tanks, SUMPS, FRP, PUF and SMC panel tanks cover the entire range of water storage requirements.



SINTEX TRIPLE-LAYER WATER TANKS

FEATURES:

- Brighter
- Stronger
- Virgin plastic
- FDA approved
- Triple-layer body
- 100% UV stabilised
- Rustproof
- Algae formation protection
- Maintenance-free
- Cooler
- Multilayer
- Aesthetic design

RANGE & SPECIFICATIONS

Code No.	Capacity (Litres)	Dia. (Inch)	Height (Inch)	Manhole Dia. (Inch)
CCWS 0050-02-TLW	500	35.8	37.7	15.7
CCWS 0075-01-TLW	750	40.5	43.3	15.7
CCWS 0100-01-TLW	1000	43.3	48.2	15.7
CCWS 0150-01-TLW	1500	53.1	49.8	15.7
CCWS 0200-01-TLW	2000	53.1	62.9	15.7
CCWS 0300-01-TLW	3000	59.0	79.5	15.7
CCWS 0500-01-TLW	5000	78.7	76.3	20.1
CCWS 1000-03-TLW	10000	83.6	124.4	20.1

RANGE & SPECIFICATIONS

Code No.	Capacity (Litres)	Dia. (Inch)	Height (Inch)	Manhole Dia. (Inch)
CCWS-50.01	500	40.5	29.1	15.7
CCWS-50.02	500	35.8	37.7	15.7
CCWS-70.01	700	40.5	42.5	15.7
CCWS-75.01	750	40.5	43.3	15.7
CCWS-100.01	1000	43.3	48.2	15.7
CCWS-150.01	1500	53.1	49.8	15.7
CCWS-175.01	1750	54.7	53.1	15.7
CCWS-200.01	2000	53.1	62.9	15.7
CCWS-200.02	2000	55.5	61.8	17.7
CCWS-250.01	2500	59.0	67.7	17.7
CCWS-300.01	3000	59.0	79.5	15.7
CCWS-500.01	5000	78.7	76.3	20.0
CCWS-500.02	5000	78.7	78.7	37.0
CCWS-750.01	7500	78.7	113.3	20.0
CCWS-1000.02	10000	100.3	97.6	20.0
CCWS-1000.03	10000	83.6	124.4	20.0
CCWS-1500.01	15000	100.3	139.8	20.0
CCWS-1500.02	15000	118.1	110.2	20.0
CCWS-2000.01	20000	100.3	181.1	20.0
CCWS-2000.02	20000	118.1	130.7	20.0
CCWS-2500.01	25000	118.1	159.4	20.0

From 500 litres to 20000 litres available as per ISI specifications.

SINTEX DOUBLE LAYER WATER TANKS

FEATURES:

- Lightweight and durable
- Hygienic
- Quality tested and approved by leading laboratories, industries and institutes
- Maintenance-free
- Rustproof



SINTEX LOFT WATER TANKS

FEATURES:

- 100% virgin material
- FDA grade material
- Multipurpose usage
- Stylish design
- Suitable where space is a constraint



RANGE & SPECIFICATIONS

Code No.	Capacity (Litres)	Length (Inch)	Width (Inch)	Height (Inch)	Manhole Dia. (Inch)
IWS 10.01	100	23.4	23.4	15.1	12.2
IWS 15.01	150	28.5	28.5	14.7	12.2
IWS 20.01	200	37.7	28.5	13.7	11.8
IWS 22.01	225	40.7	28.3	15.1	12.0
IWS 27.01	270	43.5	28.7	17.1	12.0
IWS 27.02	275	48.8	35.0	12.4	12.0
IWS 30.01	300	48.0	32.8	13.5	12.0
IWS 37.01	375	49.6	37.7	13.9	11.8
IWS 40.02*	400	61.2	39.3	13.5	11.8
IWS 42.01	425	49.4	37.7	15.7	11.8
IWS 47.02*	475	62.4	45.2	12.9	11.8
IWS 50.01	500	55.5	39.5	17.3	12.0
IWS 50.02**	500	58.0	31.0	16.0	12.0
IWS 62.01*	625	56.9	38.6	20.5	11.8
IWS 82.01*	825	78.5	39.3	20.1	11.2
IWS 100.01*	1000	78.3	39.1	24.4	11.2

*Double-lid, White Loft Tank is meant only for indoor installation.

**Available from selected factories.

RENOTUF WATER TANKS

FEATURES:

- Strong and durable
- FDA grade material for hygiene
- Stylish design
- 100% virgin material
- Value for money

RANGE & SPECIFICATIONS

Code No.	Capacity (Litres)	Dia. (Inch)	Height (Inch)	Manhole Dia. (Inch)
WSTF 20-01	200	27.9	23.0	11.0
WSTF 30-01	300	27.9	34.4	11.0
WSTF 50-01	500	36.2	33.4	15.5
WSTF 75-01	750	36.2	49.2	15.5
WSTF 100-01	1000	44.2	45.2	15.5



RENO G WATER TANKS

FEATURES:

- Strong and durable
- 100% virgin material
- Stylish design
- Value for money
- Double-layer tank with granite finish



RANGE & SPECIFICATIONS

Code No.	Capacity (Litres)	Dia. (Inch)	Height (Inch)	Manhole Dia. (Inch)
WSCC G 50-01	500	35.4	34.8	15.7
WSCC G 100-01	1000	43.7	46.4	15.7
WSCC G 150-01	1500	53.15	46.2	15.7
WSCC G 200-01	2000	53.15	59.4	15.7

SMC PANEL WATER TANKS

Easily installed by plumbers and general technicians using conventional tools.

FEATURES:

- Easy to assemble in any size at the site
- Safe for drinking water storage as tanks are made from FDA approved material
- Weatherproof, waterproof, moistureproof and rotproof
- Easy to dismantle and shift in case of change in site
- Easy to increase or decrease the size
- Very quick installation, 1,00,000 ltr. water storage tank can be installed within 4 days



RANGE & SPECIFICATIONS

Code No.	Nominal Capacity (KL)	Length (mtr.)	Breadth (mtr.)	Depth (mtr.)
GS-PT-008-S2	8	2	2	2
GS-PT-010-S2.5	10	2	2	2.5
GS-PT-018-S2	18	3	3	2
GS-PT-022-S2.5	22.5	3	3	2.5
GS-PT-027-S3	27	3	3	3
GS-PT-032-S2	32	4	4	2
GS-PT-040-S2.5	40	4	4	2.5
GS-PT-048-S3	48	4	4	3
GS-PT-050-S2	50	5	5	2
GS-PT-062-S2.5	62.5	5	5	2.5
GS-PT-072-S2.5	72	6	6	2
GS-PT-075-S3	75	5	5	3
GS-PT-090-S2.5	90	6	6	2.5
GS-PT-098-S2	98	7	7	2
GS-PT-108-S3	108	6	6	3
GS-PT-122-S2.5	122.5	7	7	2.5
GS-PT-128-S2	128	8	8	2
GS-PT-147-S3	147	7	7	3
GS-PT-160-S2.5	160	8	8	2.5
GS-PT-162-S2	162	9	9	2
GS-PT-192-S3	192	8	8	3
GS-PT-200-S2	200	10	10	2
GS-PT-202-S2.5	202.5	9	9	2.5
GS-PT-242-S2	242	11	11	2
GS-PT-243-S3	243	9	9	3
GS-PT-250-S2.5	250	10	10	2.5
GS-PT-288-S2	288	12	12	2
GS-PT-300-S2	300	10	10	3
GS-PT-302-S2.5	302.5	11	11	2.5
GS-PT-338-S2	338	13	13	2
GS-PT-360-S2.5	360	12	12	2.5
GS-PT-363-S3	363	11	11	3
GS-PT-422-S2.5	422	13	13	2.5
GS-PT-432-S3	432	12	12	3
GS-PT-450-S2	450	15	15	2
GS-PT-490-S2.5	490	14	14	2.5
GS-PT-507-S3	507	13	13	3
GS-PT-512-S2	512	16	16	2
GS-PT-562-S2.5	562.5	15	15	2.5
GS-PT-588-S3	588	14	14	3
GS-PT-640-S2.5	640	16	16	2.5
GS-PT-675-S3	675	15	15	3
GS-PT-768-S3	768	16	16	3
GS-PT-867-S3	867	17	17	3
GS-PT-972-S3	972	18	18	3
GS-PT-1083-S3	1083	19	19	3
GS-PT-1200-S3	1200	20	20	3

Series GS-PT SMC Panel Tanks



SINTEX INDUSTRIES LIMITED (PLASTICS DIVISION)

Head Office: Kalol, North Gujarat - 382721, India.

Phone: 02764-253500, Fax: 02764 253 800

E-mail: wst@sintex.co.in

Web site: www.sintex-plastics.com

For business enquiry, write to us at wst@sintex.co.in

(Branch office stamp)

SINTEX UNDERGROUND WATER TANKS (FRP)

FEATURES:

- FDA approved
- Rustproof and leak-proof
- 100% virgin material
- Lightweight
- Durable and cost effective
- Impermeable to roots of trees
- Easy to install/transport
- Hygienic and suitable for potable water
- Computerised design for excellent strength
- Non-porous and does not allow water to get contaminated

RANGE & SPECIFICATIONS

Code No.	Capacity (Litres)	Dia. (mm)	Length (mm)	Manhole Dia. (mm)
CWUG 1000-01	10000	1830	4310	550
CWUG 1500-02	15000	2340	4310	550
CWUG 2000-02	20000	2340	5520	550
CWUG 2500-02	25000	2340	6740	550
CWUG 3000-02	30000	2340	7950	550
CWUG 3500-02	35000	2340	9160	550
CWUG 4000-02	40000	2340	10380	550
CWUG 4500-02	45000	2340	11590	550
CWUG 5000-02	50000	2340	12800	550

Note: One inlet, outlet and airvent of 50mm each will be provided
+- 2% process variations.



A



A. PUF Insulated Tank with PE

B



B. PUF Insulated Tank with FRP

PUF INSULATED WATER TANKS

FEATURES:

- Uniform installation of PUF for continuous temperature control
- High quality LLDPE material is bonded with FRP to ensure hygienic and clean interior
- In the insulated models polyurethane foam is added as a middle layer during manufacturing process for proper insulation
- One-piece moulded construction, hence 100% leak-proof